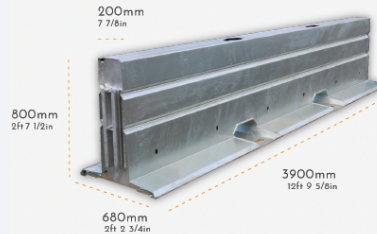


CRASH-TESTED TEMPORARY BARRIER

DEFENDER BARRIER
100 · LDSMASH 16 TL-3 and TL-4 – tested on
asphalt and concrete.*Positive protection. Proven performance.*TOP
200 mmHEIGHT
800 mmBASE
680 mmLENGTH
3 900 mmTEST STANDARD
MASH 16 · TL-3 / TL-4SERVICE LIFE
20+ yearsCRASH-TESTED
MASH 16

TL-3 · TL-4

Tested on asphalt and
concrete surfaces.TRANSPORT
234 m / truck6.4× the length of a concrete-
barrier load (37 m).ASSET LIFE
20+ yearsGalvanised steel construction.
Redeployable.WEIGHT
82 kg / mPortable with standard forklift
handling.

Measured deflection
TL-3 **130 mm - 865 mm** — variable per anchoring
configurationTL-4 **685 mm** on concrete road surface*Select configuration to match road surface, work-zone offset, and
protected asset clearance.*
Transport per truck load
DEFENDER
100 LDS **234 m**CONCRETE
BARRIER **37 m***Category reference, not a competitor callout. Fewer loads on site, faster
rollout, lower transport costs.***ANCHORING** Three options. Pick to match surface and deflection.**01****Drop-in asphalt pins**Fastest deployment on hot-mix or chip-
seal. Recover and patch on removal.**02****RoadLoc removable anchors**Re-usable anchors for repeat
deployments. Saves time on product
removal.**03****Threaded rod with epoxy**For use on concrete and lower deflection
asphalt installations.**CADENCE** Variable — anchor cadence is selected per required deflection and road surface.

POSITIVE PROTECTION – PROVEN PERFORMANCE